



Specification

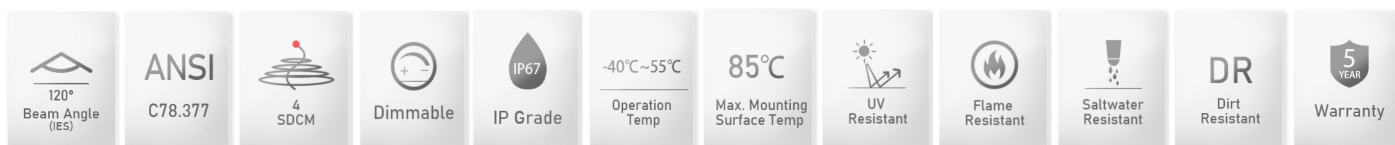

SFS10-HB-B Static Color (Silicon)

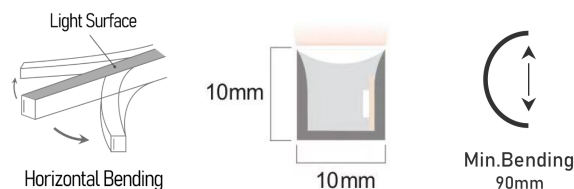

Technical Parameters

Electrical	Input Voltage	24V Constant Voltage (CV)
	Power Consumption	9W/m
Optical	LED Type & Brand	SMD 2835, Epistar
	CRI	>80, (R90, R95 customizable)
Physical	Beam Angle	120° (IES)
	Min. Cutting Length	50mm
	Min. Bending Diameter	Φ90mm
Temperature	Operation Temperature	-40°C~55°C
	Max. Mounting Surface Temp.	85°C
Durability	Warranty	5 Years Warranty
	Max. IP Rating	IP67
	Lumen Maintenance	70,000 Hours L70 @ 25°C, 50,000 Hours L70 @ 50°C

Models List

Model No.	Voltage	Color	Power/m	LED Qty/m	Min. Cutting	Lumen/m	Max. Run Length /Single End
SFS10-HB-B-CV24-168-22K-R80-9W	24V	2200K	9W	168pcs	41.7mm	490lm±5%	5m
SFS10-HB-B-CV24-168-27K-R80-9W	24V	2700K	9W	168pcs	41.7mm	490lm±5%	5m
SFS10-HB-B-CV24-168-30K-R80-9W	24V	3000K	9W	168pcs	41.7mm	530lm±5%	5m
SFS10-HB-B-CV24-168-35K-R80-9W	24V	3500K	9W	168pcs	41.7mm	530lm±5%	5m
SFS10-HB-B-CV24-168-40K-R80-9W	24V	4000K	9W	168pcs	41.7mm	545lm±5%	5m
SFS10-HB-B-CV24-168-50K-R80-9W	24V	5000K	9W	168pcs	41.7mm	555lm±5%	5m
SFS10-HB-B-CV24-168-57K-R80-9W	24V	5700K	9W	168pcs	41.7mm	570lm±5%	5m
SFS10-HB-B-CV24-168-65K-R80-9W	24V	6500K	9W	168pcs	41.7mm	570lm±5%	5m
SFS10-HB-B-CV24-168-R-R80-9W	24V	Red	9W	168pcs	41.7mm	135lm±5%	5m
SFS10-HB-B-CV24-168-G-R80-9W	24V	Green	9W	168pcs	41.7mm	305lm±5%	5m
SFS10-HB-B-CV24-168-B-R80-9W	24V	Blue	9W	168pcs	41.7mm	50lm±5%	5m

Specification

Illuminance Distribution

