



# Specification

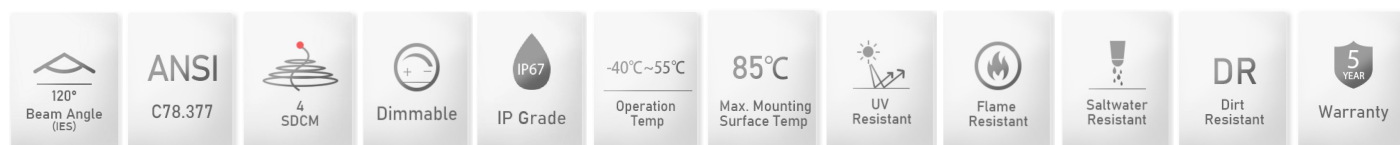

## SFS13-HB-B Static Color (Silicon)

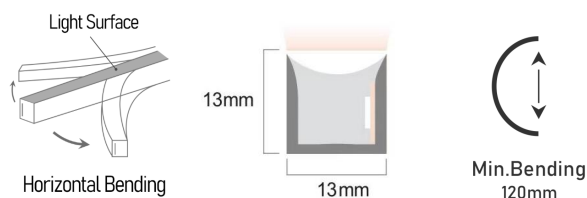

## Technical Parameters

Electrical	Input Voltage	24V Constant Voltage (CV)
	Power Consumption	12W/m
Optical	LED Type & Brand	SMD 2835, Epistar
	CRI	>80, (R90, R95 customizable)
	Beam Angle	120° (IES)
Physical	Min. Cutting Length	50mm
	Min. Bending Diameter	Φ120mm
Temperature	Operation Temperature	-40°C~55°C
	Max. Mounting Surface Temp.	85°C
Durability	Warranty	5 Years Warranty
	Max. IP Rating	IP67
	Lumen Maintenance	70,000 Hours L70 @ 25°C, 50,000 Hours L70 @ 50°C

## Models List

Model No.	Voltage	Color	Power/m	LED Qty/m	Min. Cutting	Lumen/m	Max. Run Length /Single End
SFS13-HB-B-CV24-120-22K-R80-12W	24V	2200K	12W	120pcs	50mm	655lm±5%	8m
SFS13-HB-B-CV24-120-27K-R80-12W	24V	2700K	12W	120pcs	50mm	655lm±5%	8m
SFS13-HB-B-CV24-120-30K-R80-12W	24V	3000K	12W	120pcs	50mm	705lm±5%	8m
SFS13-HB-B-CV24-120-35K-R80-12W	24V	3500K	12W	120pcs	50mm	720lm±5%	8m
SFS13-HB-B-CV24-120-40K-R80-12W	24V	4000K	12W	120pcs	50mm	720lm±5%	8m
SFS13-HB-B-CV24-120-50K-R80-12W	24V	5000K	12W	120pcs	50mm	740lm±5%	8m
SFS13-HB-B-CV24-120-57K-R80-12W	24V	5700K	12W	120pcs	50mm	765lm±5%	8m
SFS13-HB-B-CV24-120-65K-R80-12W	24V	6500K	12W	120pcs	50mm	765lm±5%	8m
SFS13-HB-B-CV24-120-R-R80-12W	24V	Red	12W	120pcs	50mm	180lm±5%	8m
SFS13-HB-B-CV24-120-G-R80-12W	24V	Green	12W	120pcs	50mm	465lm±5%	8m
SFS13-HB-B-CV24-120-B-R80-12W	24V	Blue	12W	120pcs	50mm	68lm±5%	8m

# Specification

## Illuminance Distribution

