



Accessories for

SF09 PVC


Contents

1. Connectors	02
1.1 IP67 Injection-moulded Connector	
1.2 IP68 Dual Injection-moulded Connector	
1.3 DIY Connector	
1.4 On Cable Waterproof connector	
2. Mounting Profile	06
2.1 Standard Aluminum Profile	
2.2 Self Locking Aluminum Profile	
2.3 Bendable Stainless Steel Profile	
3. Packaging	07

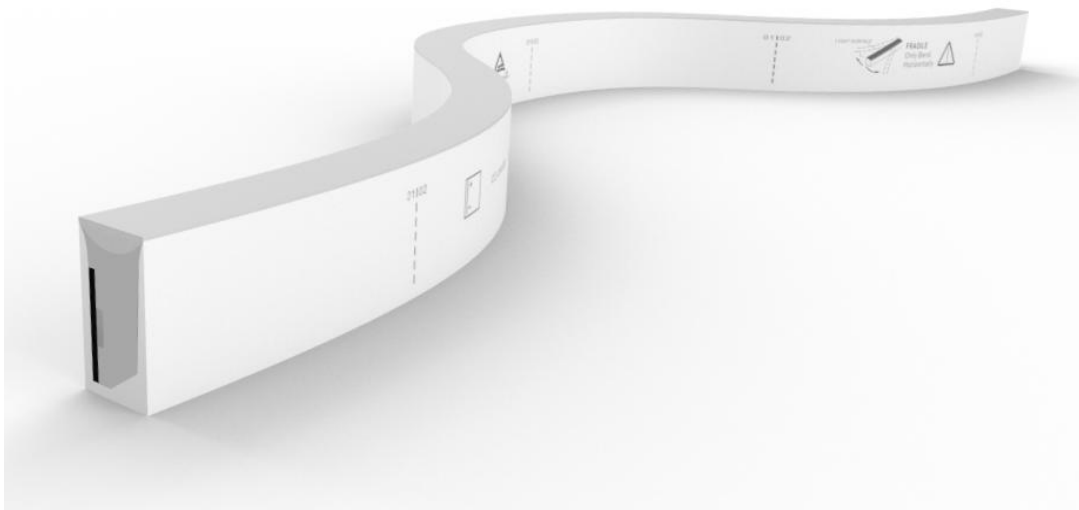



1. Connectors

1.1 IP67 Injection-moulded Connector

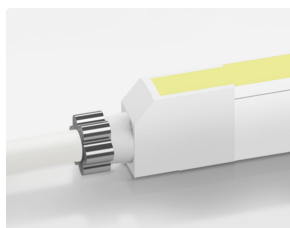


Injection-moulded Front Connector (Direct)
SF09-IM-D

Factory Pre-installed
Cable Output: direct
Standard Cable Length: 0.5m/1m/2m/3m

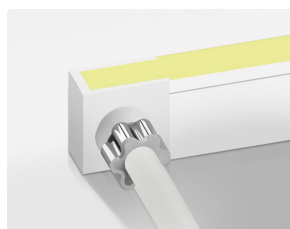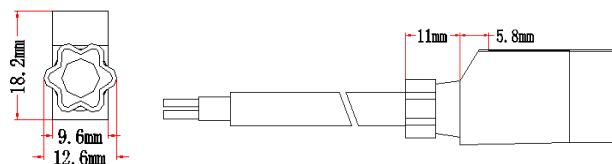


Injection-moulded Front Connector (Side)
SF09-IM-S

Factory Pre-installed
Cable Output: side
Standard Cable Length: 0.5m/1m/2m/3m

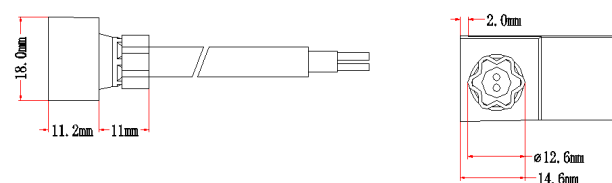



Injection-moulded Front Connector (Bottom)
SF09-IM-B

Factory Pre-installed
Cable Output: bottom
Standard Cable Length: 0.5m/1m/2m/3m

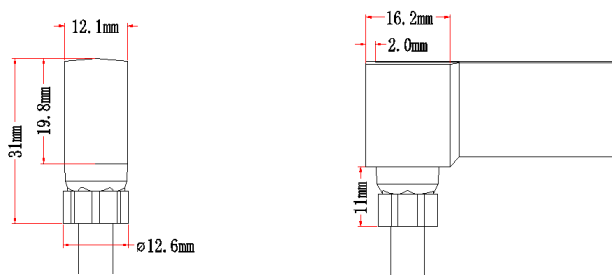



Injection-moulded Middle Connector
SF09-IM-MC

Factory Pre-installed
Cable Output: side
Standard Cable Length: 0.5m/1m/2m/3m

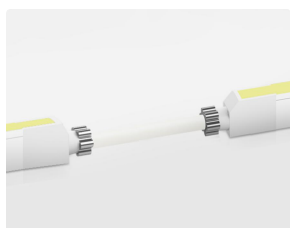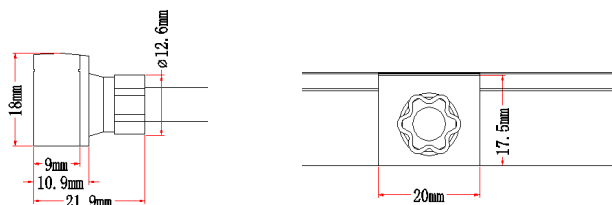

Injection-moulded Middle Jumper
SF09-IM-MJ

Factory Pre-installed
Cable Output: direct
Standard Cable Length: 0.2m~2m

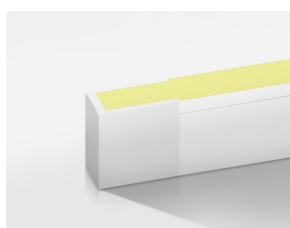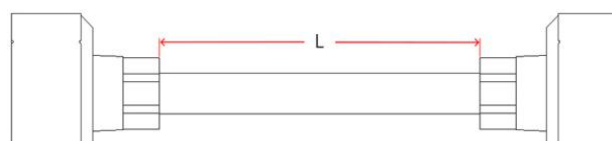


Injection-moulded End Cap
SF09-IM-EC

Factory Pre-installed





1. Connectors

1.2 IP68 Dual Injection-moulded Connector

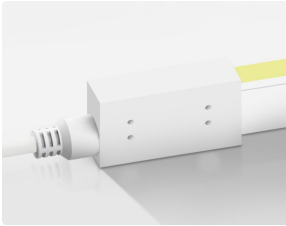


Dual Injection-moulded Front Connector (Direct)
SF09-DI-D

Factory Pre-installed
Cable Output: direct
Standard Cable Length: 0.5m/1m/2m/3m

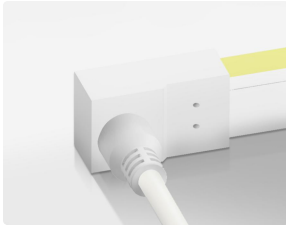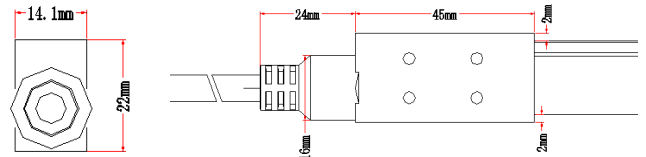



Dual Injection-moulded Front Connector (Side)
SF09-DI-S

Factory Pre-installed
Cable Output: side
Standard Cable Length: 0.5m/1m/2m/3m

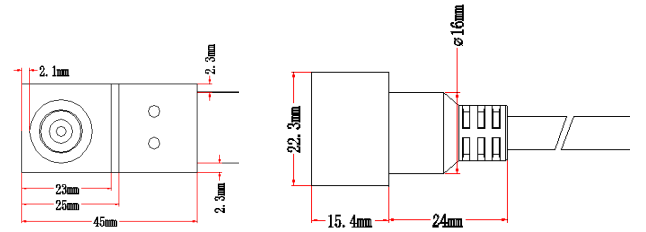

Dual Injection-moulded Front Connector (Bottom)
SF09-DI-B

Factory Pre-installed
Cable Output: bottom
Standard Cable Length: 0.5m/1m/2m/3m

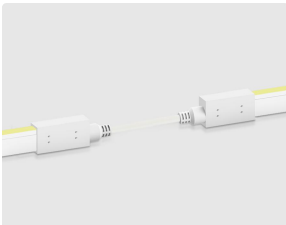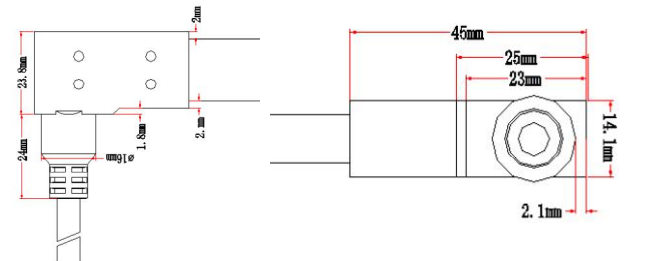


Dual Injection-moulded Middle Jumper
SF09-DI-MJ

Factory Pre-installed
Cable Output: direct
Standard Cable Length: 0.2m~2m



Dual Injection-moulded End Cap
SF09-DI-EC


Factory Pre-installed

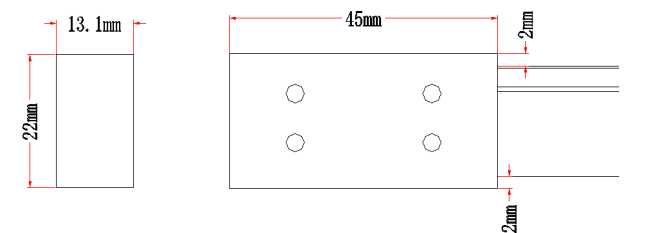

Note: Submersible ≤2m



1. Connectors

1.3 DIY Connector

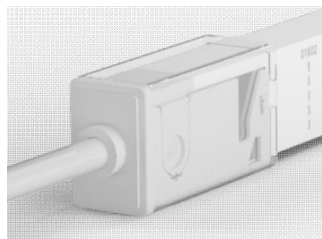



IP67 Sleeve Front Connector (Direct)
SF09-SL-D

DIY type, can be installed on site
Cable Output: direct
Standard Cable Length: 0.5m/1m/2m/3m

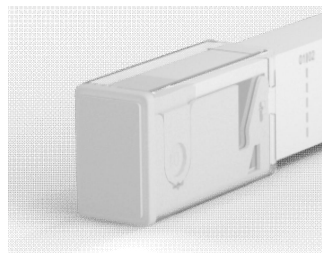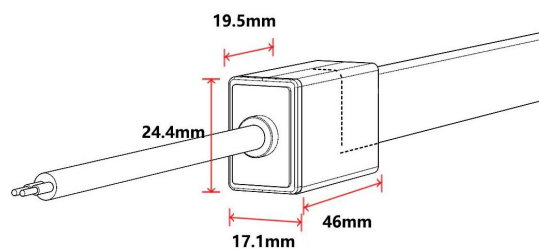



IP67 Sleeve End Cap
SF09-SL-EC

DIY type, can be installed on site

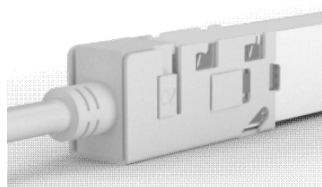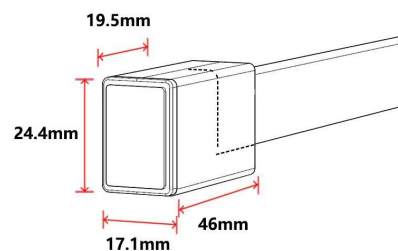



IP65 Clasp Front Connector (Direct)
SF09-CL-D

DIY type, can be installed on site
Cable Output: direct
Standard Cable Length: 0.5m/1m/2m/3m

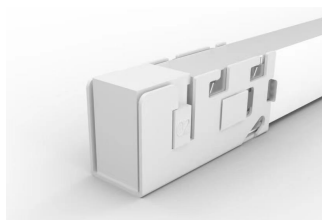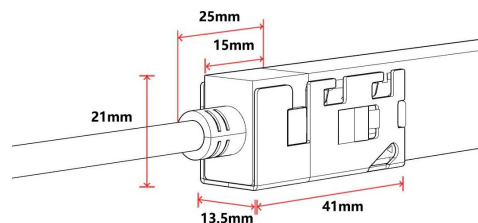



IP65 Clasp End Cap
SF09-CL-EC

DIY type, can be installed on site

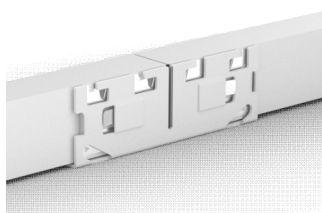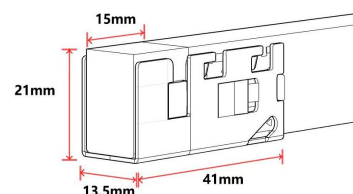


IP65 Seamless Middle Connector
SF09-CL-MC

DIY type, can be installed on site
Cable Output: direct
Standard Cable Length: 0.2m~2m

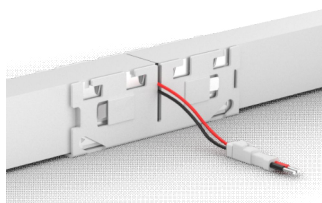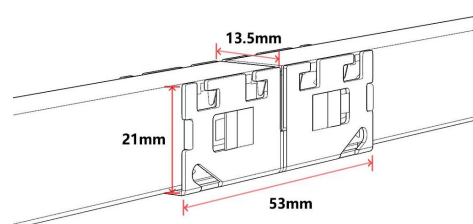


IP65 Seamless Power T-Feed
SF09-CL-MTF

DIY type, can be installed on site
Cable Output: side
Standard Cable Length: 0.2m~2m

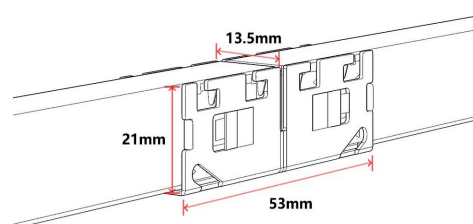


1. Connectors

1.4 On Cable Waterproof Connector



Waterproof Interrupter


The waterproof interrupter is installed on the cable at 120mm from the front connector, which protect against water ingress from inside of cable

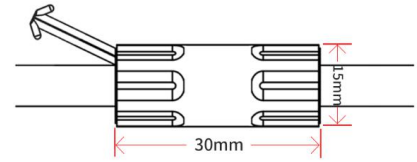

Male & Female Connector

CT01


DIY or Pre-installed, IP67
Stand Cable Length: 0.5m/1m/2m/3m
Cable Diameter: Φ 6.0mm

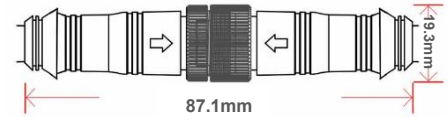

Male & Female Connector

CT02


DIY or Pre-installed, IP68 /IP67 optional





Note: For all DIY connectors, installation on site will void warranty regarding waterproof.

2. Mounting Profile

2.1 Standard Aluminum Profile ▼

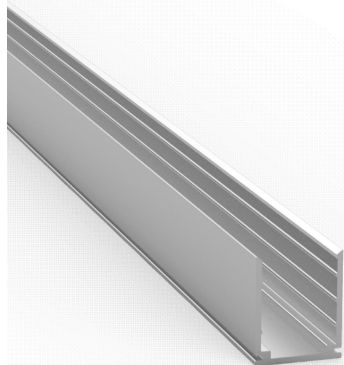


Max. Installation Angle


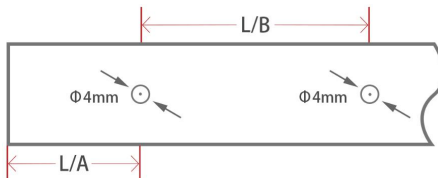


W*H	Model	Standard Length	Hole Number	Screw Hole	L/A(mm)	L/B(mm)	For Product
12x21mm	ALC-N-SF09-50	50mm	1	Φ4.0mm	25.5	/	SF09 / SFS09
	ALC-N-SF09-1000	1000mm	2	Φ4.0mm	20	60	SF09 / SFS09
	ALC-N-SF09-2000	2000mm	4	Φ4.0mm	25	50	SF09 / SFS09

2.2 Self Locking Aluminum Profile ▼

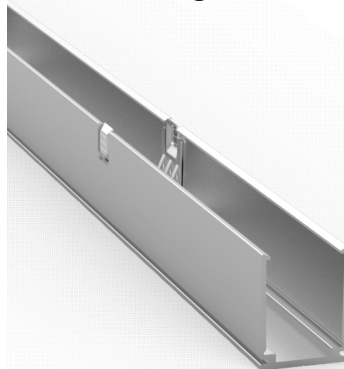


Max. Installation Angle


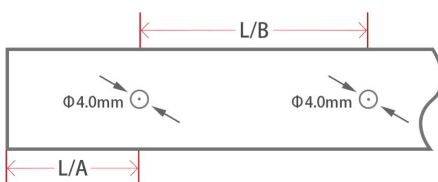


W*H	Model	Standard Length	Hole Number	Screw Hole	L/A(mm)	L/B(mm)	For Product
13.3x22mm	ALC-SL-SF09-50	50mm	1	Φ4.0mm	25.5	/	SF09 / SFS09
	ALC-SL-SF09-1000	1000mm	2	Φ4.0mm	20	60	SF09 / SFS09
	ALC-SL-SF09-2000	2000mm	4	Φ4.0mm	25	50	SF09 / SFS09

2.3 Bendable Stainless Steel Profile ▼

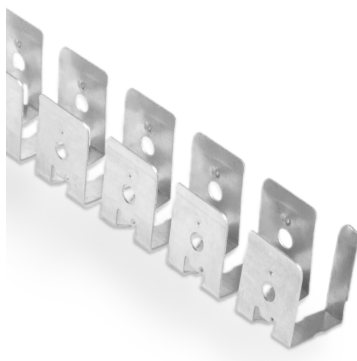


Max. Installation Angle

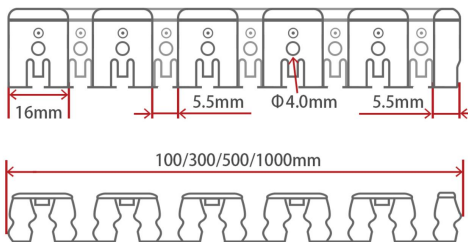

W*H	Model	Standard Length	For Product
10x18.5mm	ALC-SL-SF09-100	100mm	SF09 / SFS09
	ALC-SL-SF09-300	300mm	SF09 / SFS09
	ALC-SL-SF09-500	500mm	SF09 / SFS09
	ALC-SL-SF09-1000	1000mm	SF09 / SFS09

3. Packaging



Blister Plate



White Box



Carton



Carton



M Reel



L Reel



Carton



Carton

Neon Length	Packing Method	Inner Packing Dimension	Carton Dimension	Inner Packing No.	Carton Weight
Max. 4m	S Blister Plate + White Box	31x31x4.5cm	/	/	≤1.2kg
Max. 10m	M Blister Plate + White Box + Carton	40x50x4.5cm	41x51x25cm	5	≤15.2kg
Max. 18m	L Blister Plate + White Box + Carton	54x64x4.5cm	55x65x25cm	5	≤26.7kg
Max. 30m	XL Blister Plate + White Box + Carton	68x79x4.5cm	69x80x15.5cm	2	≤17.7kg
Max. 90m	L Reel + Carton	Φ45x25cm	47x47x28cm	1	≤23.5kg

END