

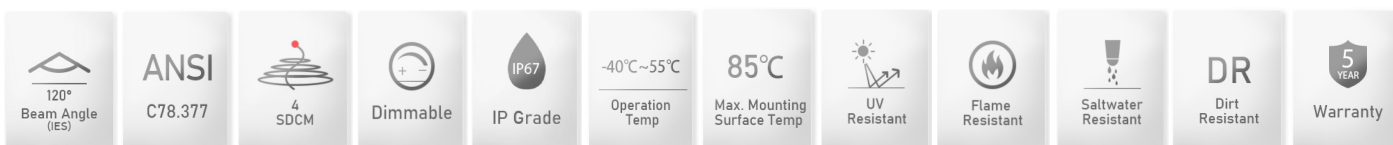


Specification



SFS13-VB-B Static Color (Silicon)



Technical Parameters

Electrical	Input Voltage	24V Constant Voltage (CV)
	Power Consumption	12W/m
Optical	LED Type & Brand	SMD 2835, Epistar
	CRI	>80, (R90, R95 customizable)
	Beam Angle	120° (IES)
Physical	Min. Cutting Length	50mm
	Min. Bending Diameter	Φ120mm
Temperature	Operation Temperature	-40°C~55°C
	Max. Mounting Surface Temp.	85°C
Durability	Warranty	5 Years Warranty
	Max. IP Rating	IP67
	Lumen Maintenance	70,000 Hours L70 @ 25°C, 50,000 Hours L70 @ 50°C

Models List

Model No.	Voltage	Color	Power/m	LED Qty/m	Min. Cutting	Lumen/m	Max. Run Length /Single End
SFS13-VB-B-CV24-140-22K-R80-12W	24V	2200K	12W	140pcs	50mm	730lm±5%	10m
SFS13-VB-B-CV24-140-27K-R80-12W	24V	2700K	12W	140pcs	50mm	730lm±5%	10m
SFS13-VB-B-CV24-140-30K-R80-12W	24V	3000K	12W	140pcs	50mm	775lm±5%	10m
SFS13-VB-B-CV24-140-35K-R80-12W	24V	3500K	12W	140pcs	50mm	795lm±5%	10m
SFS13-VB-B-CV24-140-40K-R80-12W	24V	4000K	12W	140pcs	50mm	810lm±5%	10m
SFS13-VB-B-CV24-140-50K-R80-12W	24V	5000K	12W	140pcs	50mm	815lm±5%	10m
SFS13-VB-B-CV24-140-57K-R80-12W	24V	5700K	12W	140pcs	50mm	835lm±5%	10m
SFS13-VB-B-CV24-140-65K-R80-12W	24V	6500K	12W	140pcs	50mm	835lm±5%	10m
SFS13-VB-B-CV24-140-R-R80-12W	24V	Red	12W	140pcs	50mm	210lm±5%	10m
SFS13-VB-B-CV24-140-G-R80-12W	24V	Green	12W	140pcs	50mm	450lm±5%	10m
SFS13-VB-B-CV24-140-B-R80-12W	24V	Blue	12W	140pcs	50mm	95lm±5%	10m

Specification

Illuminance Distribution

