


Specification



SFS06-B Static Color (Silicon)

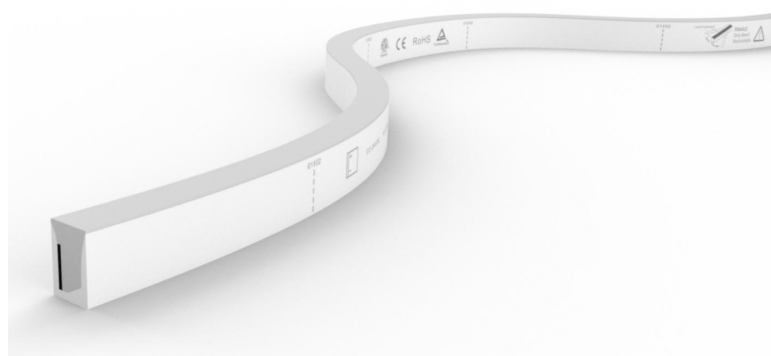

Technical Parameters

Electrical	Input Voltage	24V Constant Voltage (CV)
	Power Consumption	7W/m
Optical	LED Type & Brand	SMD 2835, Epistar
	CRI	>80, (R90, R95 customizable)
	Beam Angle	120° (IES)
Physical	Min. Cutting Length	41.7mm
	Min. Bending Diameter	Φ50mm
Temperature	Operation Temperature	-40°C~55°C
	Max. Mounting Surface Temp.	85°C
Durability	Warranty	5 Years Warranty
	Max. IP Rating	IP67
	Lumen Maintenance	70,000 Hours L70 @ 25°C, 50,000 Hours L70 @ 50°C

Models List

Model No.	Voltage	Color	Power/m	LED Qty/m	Min. Cutting	Lumen/m	Max. Run Length /Single End
SFS06-B-CV24-168-22K-R80-7W	24V	2200K ●	7W	168pcs	41.7mm	185lm±5%	5m
SFS06-B-CV24-168-27K-R80-7W	24V	2700K ●	7W	168pcs	41.7mm	185lm±5%	5m
SFS06-B-CV24-168-30K-R80-7W	24V	3000K ●	7W	168pcs	41.7mm	200lm±5%	5m
SFS06-B-CV24-168-35K-R80-7W	24V	3500K ●	7W	168pcs	41.7mm	200lm±5%	5m
SFS06-B-CV24-168-40K-R80-7W	24V	4000K ●	7W	168pcs	41.7mm	210lm±5%	5m
SFS06-B-CV24-168-50K-R80-7W	24V	5000K ●	7W	168pcs	41.7mm	210lm±5%	5m
SFS06-B-CV24-168-57K-R80-7W	24V	5700K ●	7W	168pcs	41.7mm	225lm±5%	5m
SFS06-B-CV24-168-65K-R80-7W	24V	6500K ●	7W	168pcs	41.7mm	225lm±5%	5m
SFS06-B-CV24-168-R-R80-7W	24V	Red ●	7W	168pcs	41.7mm	88lm±5%	5m
SFS06-B-CV24-168-G-R80-7W	24V	Green ●	7W	168pcs	41.7mm	140lm±5%	5m
SFS06-B-CV24-168-B-R80-7W	24V	Blue ●	7W	168pcs	41.7mm	29lm±5%	5m

Specification

Illuminance Distribution

