


Specification



SF29-A-CV24-RGB-60-12W

Color Changing (PVC)

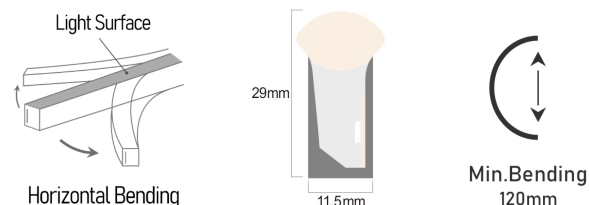

160° Beam Angle (IES)	IP68 Submersible ≤2m	-20°C~45°C Operation Temp	60°C Max. Mounting Surface Temp	LM 80	UV Resistant	Flame Resistant	Saltwater Resistant	Solvents Resistant	IK08 Protection	VR Vulcanization Resistant	3 YEAR Warranty
-----------------------	----------------------	---------------------------	---------------------------------	-------	--------------	-----------------	---------------------	--------------------	-----------------	----------------------------	-----------------

Technical Specifications

Electrical	Input Voltage	24V, Constant Voltage (CV)
	Power Consumption	12W/m
	Max. Run Length	Single End -10m; Double Ends -20m
Optical	LED Type & Brand	SMD 5050, Epistar
	LED Color	RGB
	Lumen/m	150lm ±5%
	Beam Angle	160° (IES)
Physical	LED Qty	60 LEDs/m
	Min. Cutting Length	100mm
	Min. Bending Diameter	Φ120mm
Temperature	Operation Temperature	-20°C~45°C
	Max. Mounting Surface Temp.	60°C
Durability	Warranty	3 Years Warranty
	Lumen Maintenance	70,000 Hours L70 @ 25°C, 50,000 Hours L70 @ 50°C
	Max. IP Rating	IP68, underwater ≤ 2m

Illuminance Distribution

