


Specification



SF29-S-DMX Pixel Chasing Single Color /DW (PVC)

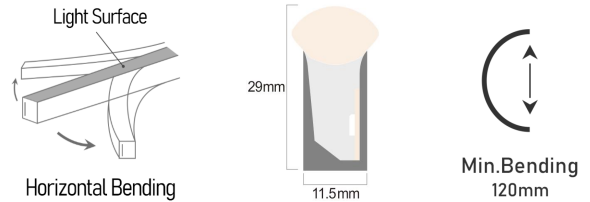

Technical Parameters

Electrical	Input Voltage	DC24V
	IC Type	DMX512
	IC Chip Model.	UCS512B3, UCS512B4
Optical	LED Type & Chip Brand	SMD LED, Epistar
	LED Color	Single Color, Dual White
Physical	Min. Cutting Length	100mm
	Min. Bending Diameter	Φ120mm
Temperature	Operation Temperature	-20°C~45°C
	Max. Mounting Surface Temp.	60°C
Durability	Warranty	3 Years Warranty
	Lumen Maintenance	70,000 Hours L70 @ 25°C, 50,000 Hours L70 @ 50°C
	Max. IP Rating	IP68, underwater ≤ 2m



Models List

Model No.	LED Color	Power/m	Lumen/m	IC Chip	Pixel /m	Min. Cutting Length	Max. Run Length /Single End
SF29-S-DMX-CC24-27K-70-15W	2700K	15W/m	295lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SF29-S-DMX-CC24-30K-70-15W	3000K	15W/m	310lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SF29-S-DMX-CC24-40K-70-15W	4000K	15W/m	340lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SF29-S-DMX-CC24-50K-70-15W	5000K	15W/m	340lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SF29-S-DMX-CC24-57K-70-15W	5700K	15W/m	360lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SF29-S-DMX-CC24-R-70-15W	Red	15W/m	160lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SF29-S-DMX-CC24-G-70-15W	Green	15W/m	205lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SF29-S-DMX-CC24-B-70-15W	Blue	15W/m	38lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SF29-S-DMX-CC24-DW-120-17W	Dual White	17W/m	370lm±5%	UCS512B4	10 Pixels/m	100mm	7m



Specification

ILLUMINANCE DISTRIBUTION



3000K

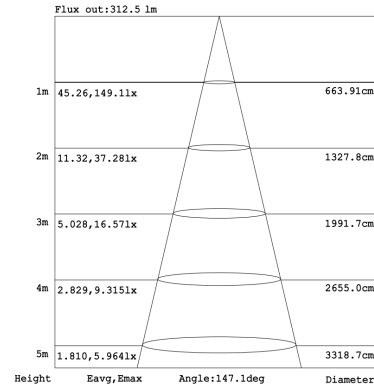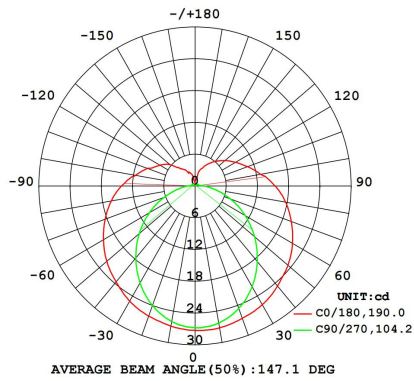

Red

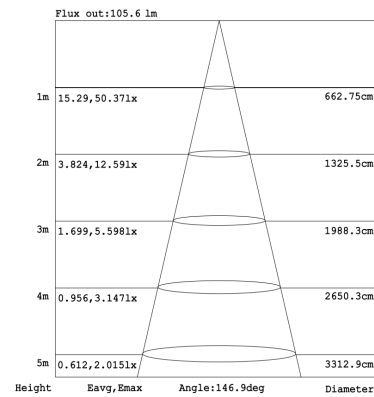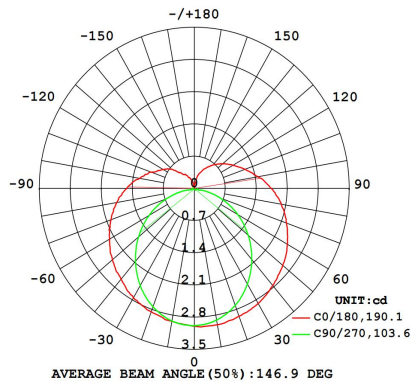

Green

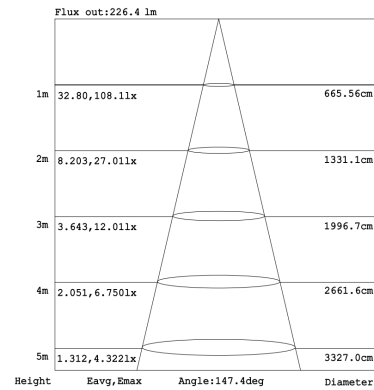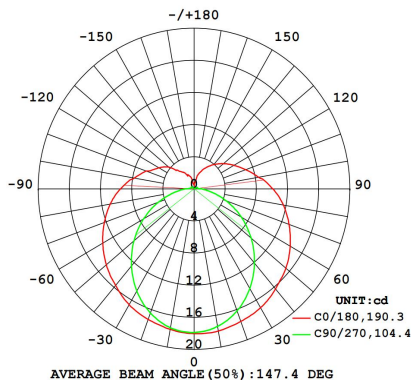

Blue

