


Specification



SFS29-DW-CV24-108-R80-15W

Dynamic White (Silicon)

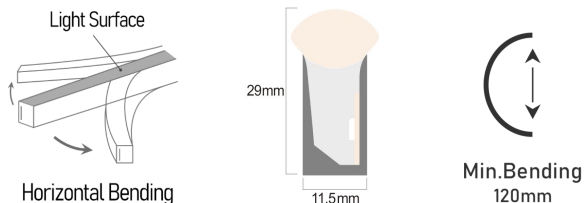

160° Beam Angle (IES)	ANSI C78.377	4 SDCM	Dimmable	IP Grade	-40°C~55°C	85°C	UV Resistant	Flame Resistant	Saltwater Resistant	VR Vulcanization Resistant	5 YEAR Warranty
-----------------------	--------------	--------	----------	----------	------------	------	--------------	-----------------	---------------------	-------------------------------	-----------------

Technical Specifications

Electrical	Input Voltage	24V, Constant Voltage (CV)
	Power Consumption	15W/m
	Max. Run Length	Single End -8m; Double Ends -16m
Optical	LED Type & Brand	SMD 3030, Epistar
	LED Color	2200K+5700K
	CRI	>80, (R90, R95 customizable)
	Lumen/m	255lm+335lm
	Beam Angle	160° (IES)
Physical	LED Qty	108 LEDs/m
	Min. Cutting Length	55.5mm
	Min. Bending Diameter	Φ120mm
Temperature	Operation Temperature	-40°C~55°C
	Max. Mounting Surface Temp.	85°C
Durability	Warranty	5 Years Warranty
	Max. IP Rating	IP67
	Lumen Maintenance	70,000 Hours L70 @ 25°C, 50,000 Hours L70 @ 50°C

Illuminance Distribution

(2200K+5700K)

