



Specification

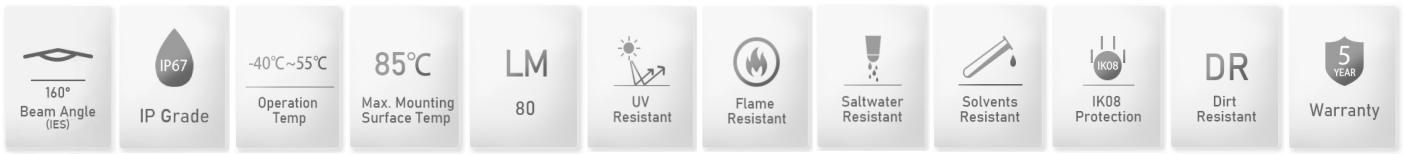

SFS29-S-DMX Pixel Chasing Single Color /DW (Silicon)

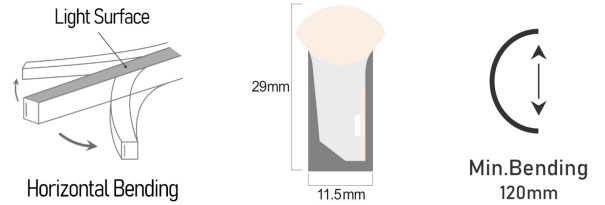

Technical Parameters

Electrical	Input Voltage	DC24V
	IC Type	DMX512
	IC Chip Model.	UCS512B3, UCS512B4
Optical	LED Type & Chip Brand	SMD LED, Epistar
	LED Color	Single Color, Dual White
Physical	Min. Cutting Length	100mm
	Min. Bending Diameter	Φ120mm
Temperature	Operation Temperature	-40°C~55°C
	Max. Mounting Surface Temp.	85°C
Durability	Warranty	5 Years Warranty
	Max. IP Rating	IP67
	Lumen Maintenance	70,000 Hours L70 @ 25°C, 50,000 Hours L70 @ 50°C



Models List

Model No.	LED Color	Power/m	Lumen/m	IC Chip	Pixel /m	Min. Cutting Length	Max. Run Length /Single End
SFS29-S-DMX-CC24-27K-70-15W	2700K	15W/m	330lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SFS29-S-DMX-CC24-30K-70-15W	3000K	15W/m	350lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SFS29-S-DMX-CC24-40K-70-15W	4000K	15W/m	380lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SFS29-S-DMX-CC24-50K-70-15W	5000K	15W/m	380lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SFS29-S-DMX-CC24-57K-70-15W	5700K	15W/m	405lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SFS29-S-DMX-CC24-R-70-15W	Red	15W/m	180lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SFS29-S-DMX-CC24-G-70-15W	Green	15W/m	230lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SFS29-S-DMX-CC24-B-70-15W	Blue	15W/m	42lm±5%	UCS512B3	10 Pixels/m	100mm	7m
SFS29-S-DMX-CC24-DW-120-17W	Dual White	17W/m	415lm±5%	UCS512B4	10 Pixels/m	100mm	7m



Specification

Illuminance Distribution



3000K

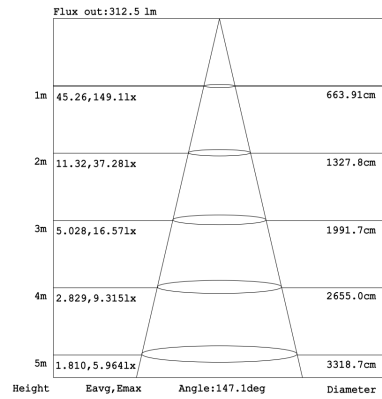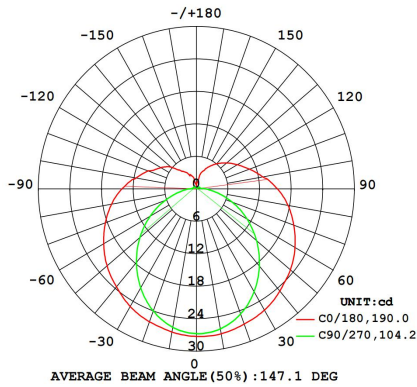

Red

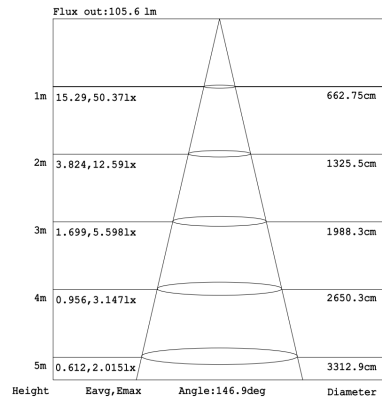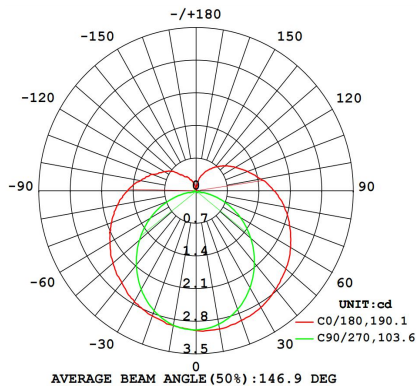

Green

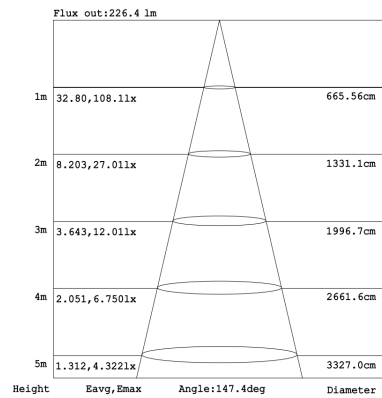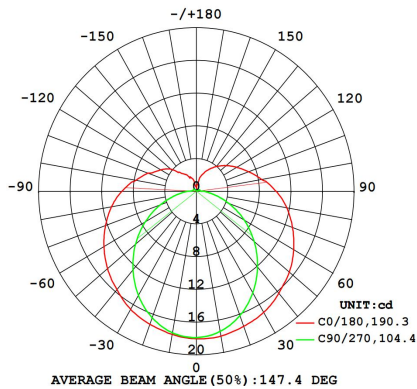

Blue

