


Specification



SFS29-S-SPI Pixel Chasing Single Color (Silicon)

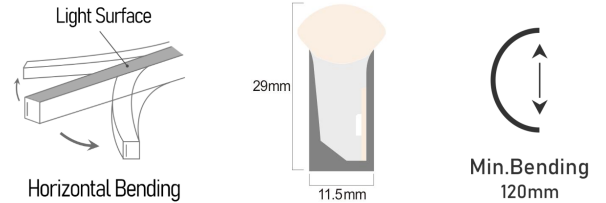

Technical Parameters

Electrical	Input Voltage	DC24V
	Power Consumption	15W/m
	IC Type	SPI
	IC Chip Model.	UCS-2903B
Optical	LED Type & Brand	SMD 5050, Epistar
	LED Color	Single Color
Physical	LED Qty	70 LEDs/m
	Min. Cutting Length	100mm
	Min. Bending Diameter	Φ120mm
Temperature	Operation Temperature	-40°C~55°C
	Max. Mounting Surface Temp.	85°C
Durability	Warranty	5 Years Warranty
	Max. IP Rating	IP67
	Lumen Maintenance	70,000 Hours L70 @ 25°C, 50,000 Hours L70 @ 50°C



Models List

Model No.	LED Color	Lumen/m	Power/m	Pixel /m	Max. Run Length /Single End
SFS29-S-SPI-CC24-27K-70-15W	2700K	330lm±5%	15W/m	10 Pixels/m	7m
SFS29-S-SPI-CC24-30K-70-15W	3000K	350lm±5%	15W/m	10 Pixels/m	7m
SFS29-S-SPI-CC24-40K-70-15W	4000K	380lm±5%	15W/m	10 Pixels/m	7m
SFS29-S-SPI-CC24-50K-70-15W	5000K	380lm±5%	15W/m	10 Pixels/m	7m
SFS29-S-SPI-CC24-57K-70-15W	5700K	405lm±5%	15W/m	10 Pixels/m	7m
SFS29-S-SPI-CC24-R-70-15W	Red	180lm±5%	15W/m	10 Pixels/m	7m
SFS29-S-SPI-CC24-G-70-15W	Green	230lm±5%	15W/m	10 Pixels/m	7m
SFS29-S-SPI-CC24-B-70-15W	Blue	42lm±5%	15W/m	10 Pixels/m	7m



Specification

Illuminance Distribution



3000K

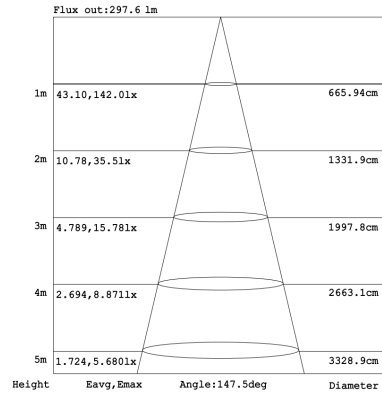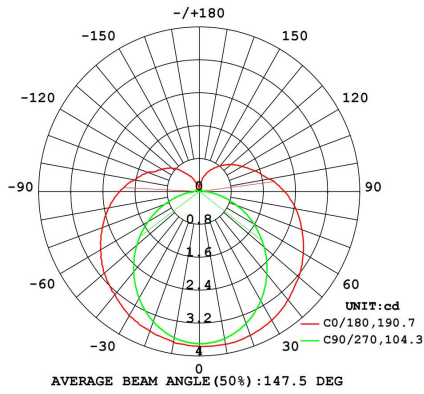

Red

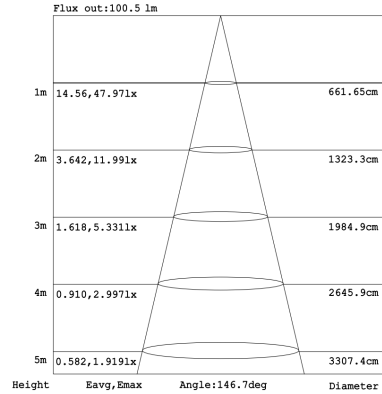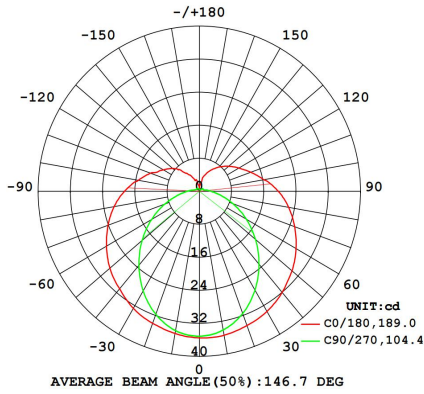

Green

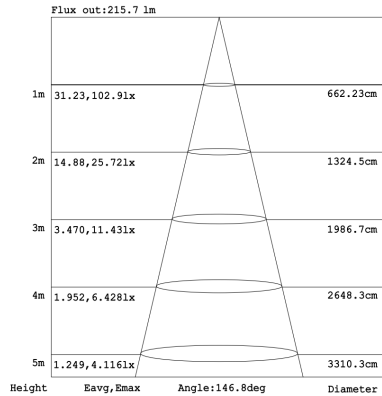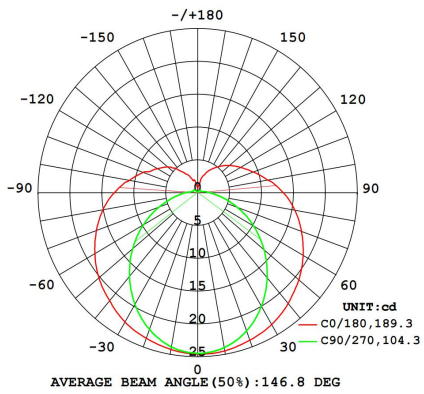

Blue

