

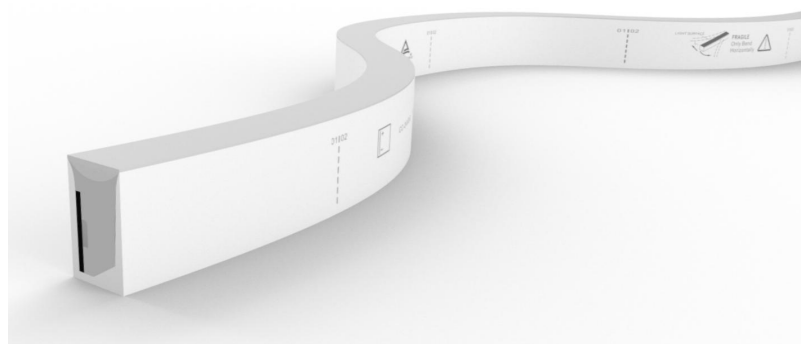


Specification

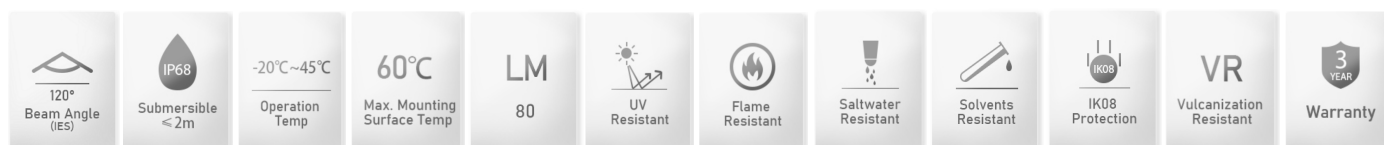

SF11-S-DMX Pixel Chasing RGB/RGBW (PVC)

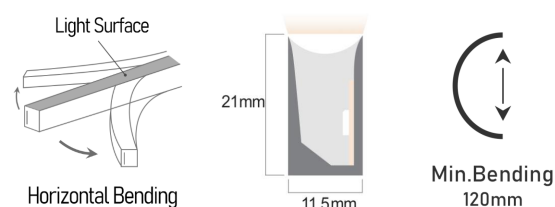

Technical Parameters

Electrical	Input Voltage	24V CC
	Power Consumption	15W/m, 18W/m
	IC Type	DMX512
	IC Chip Model.	RGB-UCS512B3; RGBW-UCS512B4
Optical	LED Type & Chip Brand	SMD 5050, Epistar
	LED Color	RGB, RGBW
Physical	LED Qty	70 LEDs/m
	Min. Cutting Length	100mm
	Min. Bending Diameter	Φ120mm
Temperature	Operation Temperature	-20°C~45°C
	Max. Mounting Surface Temp.	60°C
Durability	Warranty	3 Years Warranty
	Lumen Maintenance	70,000 Hours L70 @ 25°C, 50,000 Hours L70 @ 50°C
	Max. IP Rating	IP68, underwater ≤ 2m



Models List

Model No.	LED Color	Power/m	Lumen/m	Pixel /m	Min. Cutting Length	Max. Run Length /Single End
SF11-S-DMX-CC24-RGB-70-15W	RGB	15W/m	190lm±5%	10 Pixels	100mm	7m
SF11-S-DMX-CC24-RGBW(27K)-70-18W	RGBW(2700K)	18W/m	320lm±5%	10 Pixels	100mm	7m
SF11-S-DMX-CC24-RGBW(30K)-70-18W	RGBW(3000K)	18W/m	320lm±5%	10 Pixels	100mm	7m
SF11-S-DMX-CC24-RGBW(40K)-70-18W	RGBW(4000K)	18W/m	320lm±5%	10 Pixels	100mm	7m



Specification

RGB Illuminance Distribution



Red

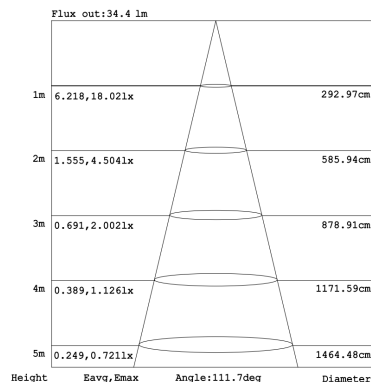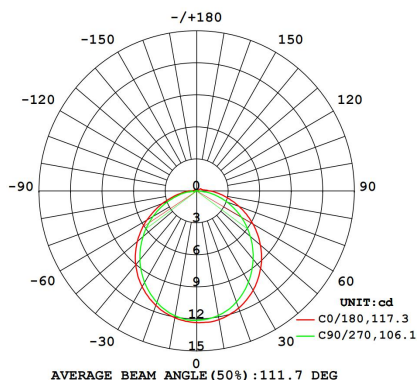



Green

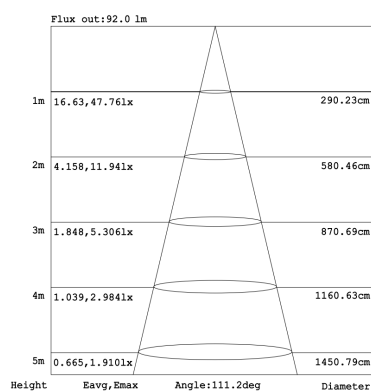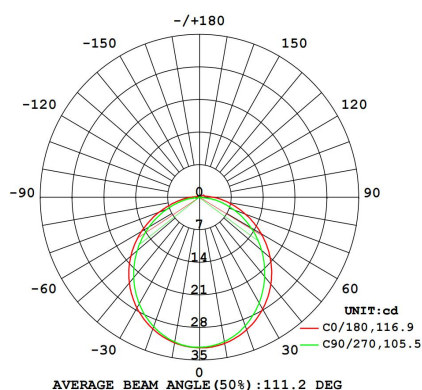

Blue

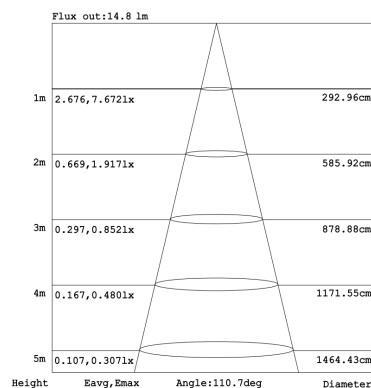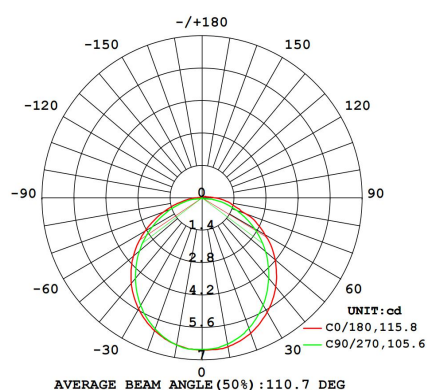



RGB

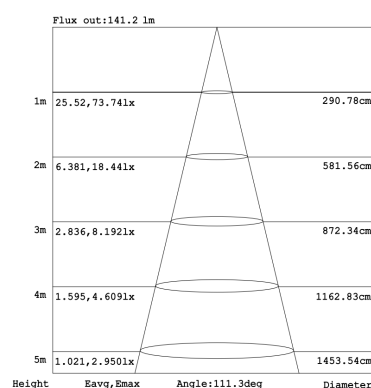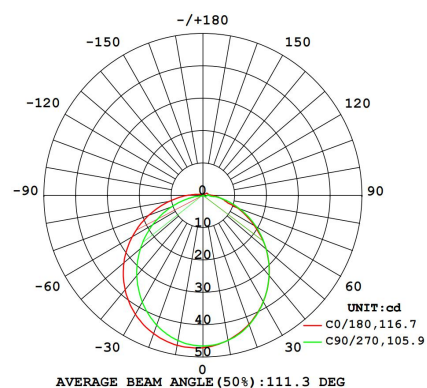



Specification

RGBW Illuminance Distribution



Red

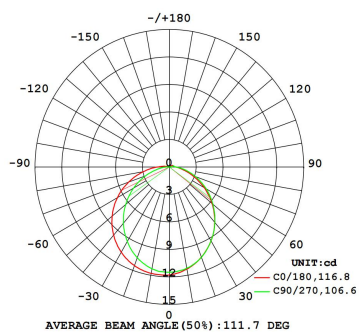



Green

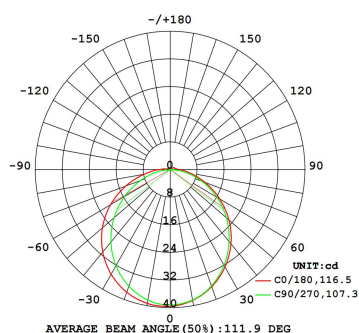

Blue

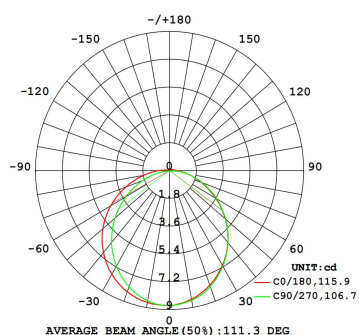

3000K

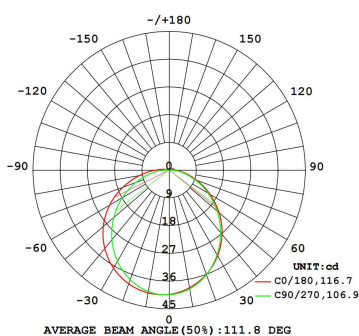

RGBW

