



Specification

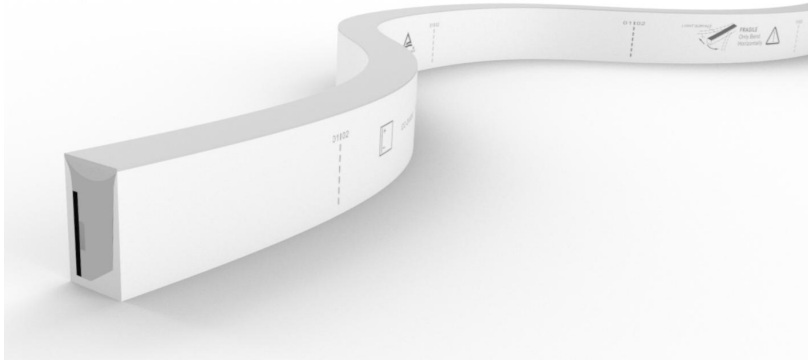

SFS11-A RGBW Color Changing (Silicon)

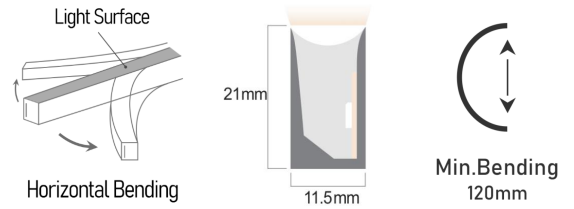

Technical Parameters

Electrical	Input Voltage	24V Constant Voltage (CV), 24V Constant Current (CC)
	Power Consumption	15W/m
Optical	LED Type & Brand	SMD 5050, Epistar
	LED Color	RGBW
	Beam Angle	120° (IES)
Physical	LED Qty	60 LEDs/m
	Min. Cutting Length	100mm
	Min. Bending Diameter	Φ120mm
Temperature	Operation Temperature	-40°C~55°C
	Max. Mounting Surface Temp.	85°C
Durability	Warranty	5 Years Warranty
	Max. IP Rating	IP67
	Lumen Maintenance	70,000 Hours L70 @ 25°C, 50,000 Hours L70 @ 50°C



Models List

Model No.	LED Color	Voltage	Working Mode	Power/m	LED Qty/m	Lumen/m	Max. Run Length /Single End
SFS11-A-CV24-RGBW(27K)-60-15W	RGBW(2700K)	24V DC	CV	15W	60pcs	295lm±5%	7m
SFS11-A-CV24-RGBW(30K)-60-15W	RGBW(3000K)						
SFS11-A-CV24-RGBW(40K)-60-15W	RGBW(4000K)						
SFS11-A-CC24-RGBW(27K)-60-15W	RGBW(2700K)	24V DC	CC	15W	60pcs	295lm±5%	12m
SFS11-A-CC24-RGBW(30K)-60-15W	RGBW(3000K)						
SFS11-A-CC24-RGBW(40K)-60-15W	RGBW(4000K)						



Specification

RGBW Illuminance Distribution



Red

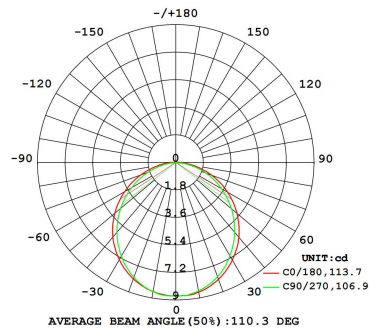



Green

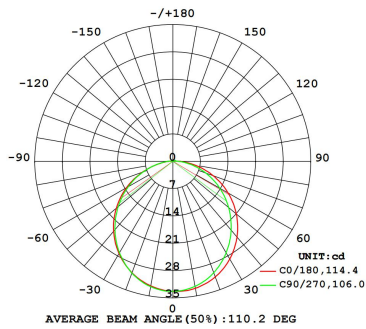

Blue

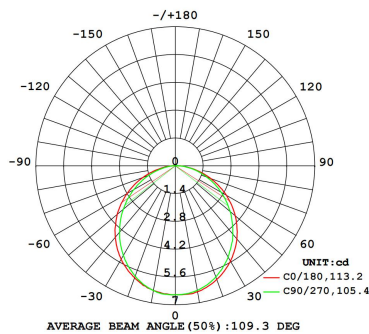

3000K

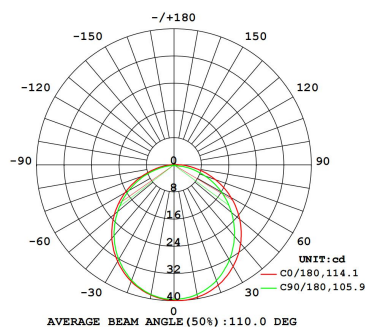

RGBW

