

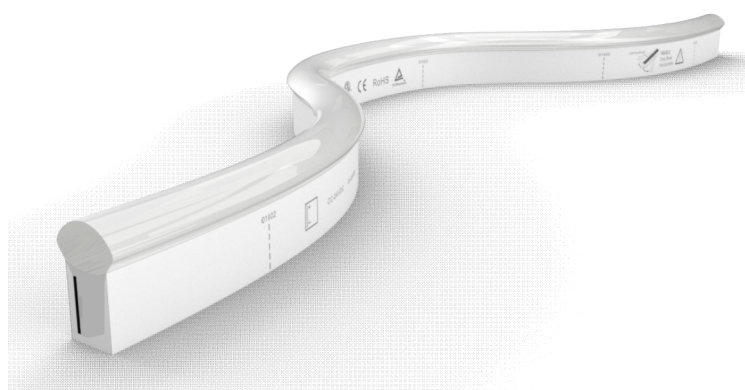


Specification

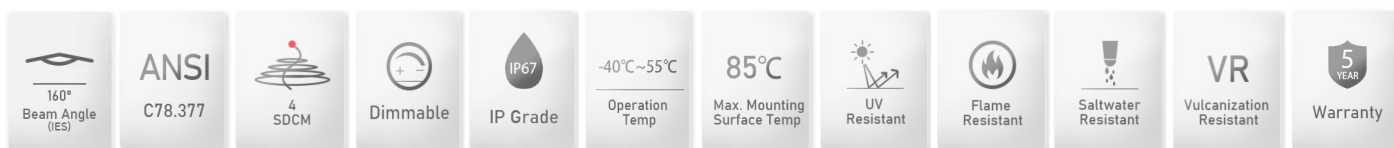

SFS17-B Static Color (Silicon)

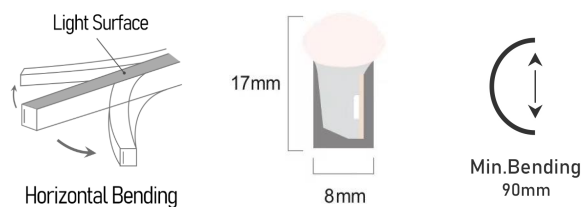

Technical Parameters

Electrical	Input Voltage	24V Constant Voltage (CV)
	Power Consumption	9W/m
Optical	LED Type & Brand	SMD 2835, Epistar
	CRI	>80, (R90, R95 customizable)
	Beam Angle	160° (IES)
Physical	Min. Cutting Length	50mm
	Min. Bending Diameter	Φ90mm
Temperature	Operation Temperature	-40°C~55°C
	Max. Mounting Surface Temp.	85°C
Durability	Warranty	5 Years Warranty
	Max. IP Rating	IP67
	Lumen Maintenance	70,000 Hours L70 @ 25°C, 50,000 Hours L70 @ 50°C

Models List

Model No.	Voltage	Color	Power/m	LED Qty/m	Min. Cutting	Lumen/m	Max. Run Length /Single End
SFS17-B-CV24-120-22K-R80-9W	24V	2200K ●	9W	120pcs	50mm	305lm±5%	5m
SFS17-B-CV24-120-27K-R80-9W	24V	2700K ●	9W	120pcs	50mm	305lm±5%	5m
SFS17-B-CV24-120-30K-R80-9W	24V	3000K ●	9W	120pcs	50mm	325lm±5%	5m
SFS17-B-CV24-120-35K-R80-9W	24V	3500K ●	9W	120pcs	50mm	355lm±5%	5m
SFS17-B-CV24-120-40K-R80-9W	24V	4000K ●	9W	120pcs	50mm	355lm±5%	5m
SFS17-B-CV24-120-50K-R80-9W	24V	5000K ●	9W	120pcs	50mm	355lm±5%	5m
SFS17-B-CV24-120-57K-R80-9W	24V	5700K ●	9W	120pcs	50mm	370lm±5%	5m
SFS17-B-CV24-120-65K-R80-9W	24V	6500K ●	9W	120pcs	50mm	370lm±5%	5m
SFS17-B-CV24-120-R-R80-9W	24V	Red ●	9W	120pcs	50mm	175lm±5%	5m
SFS17-B-CV24-120-G-R80-9W	24V	Green ●	9W	120pcs	50mm	220lm±5%	5m
SFS17-B-CV24-120-B-R80-9W	24V	Blue ●	9W	120pcs	50mm	39lm±5%	5m

Specification

Illuminance Distribution

